


# IMPLANTER



# supports en acier galvanisé, fixations & accessoires adaptés

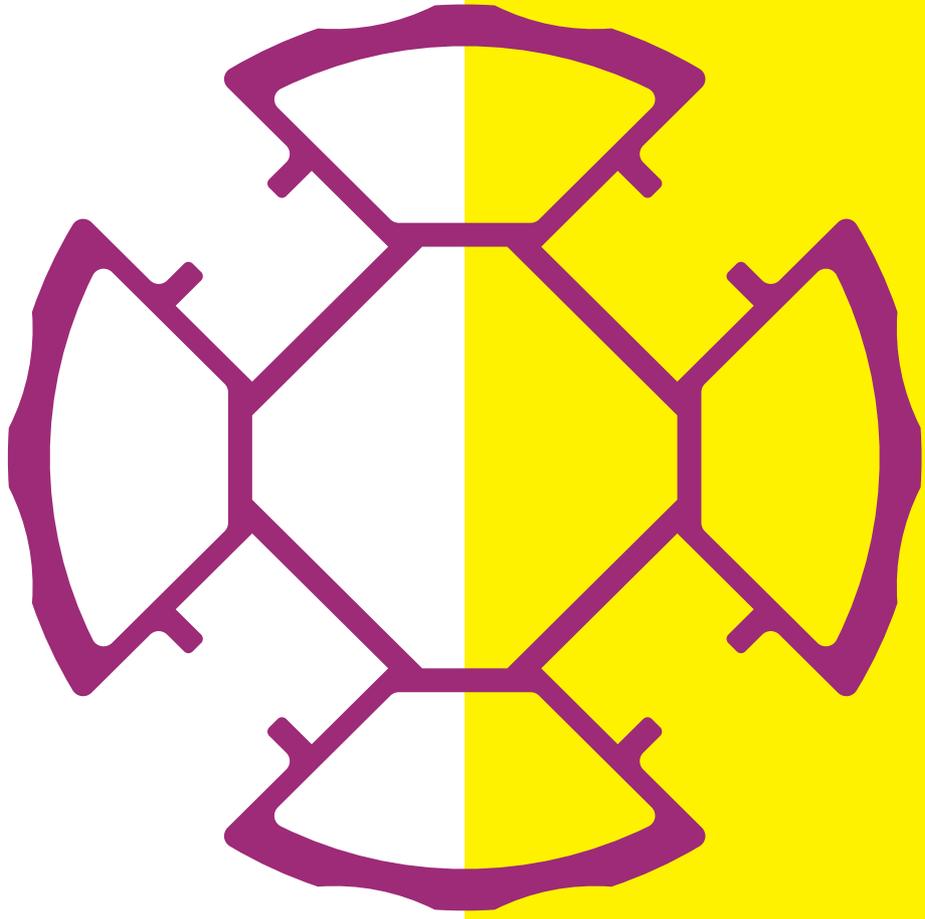

support	moment admissible	longueur	collier	bouchon	fourreau
→ 40 x 40 x 1,5*	70 m.daN	1500			fourreau 40 x 40 (cf.page 247)
		2000	40 x 40 simple face	40 x 40 rentrant	
→ 80 x 40 x 1,5	150 m.daN	2000			fourreau 80 x 40 (cf.page 247)
		2500	80 x 40 simple face	80 x 40 rentrant	
		3000			
		3500	Izi	80 x 40 couvrant	
→ 80 x 80 x 2	340 m.daN	2000			fourreau 80 x 80 (cf.page 247)
		2500	80 x 80 simple face	80 x 80 rentrant	
		3000			
		3500	80 x 80 double face (boulonnerie intermédiaire Dacromet comprise)	80 x 80 couvrant	
→ 80 x 80 x 3	660 m.daN	2000			fourreau 80 x 80 (cf.page 247)
		2500	80 x 80 double face (boulonnerie intermédiaire Dacromet comprise)	80 x 80 rentrant	
		3000		80 x 80 couvrant	
		3500	Izi		
→ tube Ø 60	150 m.daN	2000			fourreau Ø 60 (cf.page 247)
		2500	Ø 60 simple face	Ø 60 rentrant	
		3000			
		3500	Ø 60 double face Ø 60 Oméga	Ø 60 couvrant	

\* hors certification

Voir conditions générales de vente en page 251.